

Minute Impulse Analog Clock

DC-1224

DC-DigitalTM
by IES Ltd.



Features

- Immediate correction
- Surface and flush available
- Full steel case
- 24VDC
- 2- year warranty
- Simple to install
- Only two wires required
- Toll-free factory assistance

Specifications


- **Display** 12" round
- **Case** Steel 22 guage; 13.25"W x 3.25D
- **Weight** 5.0 pounds
- **Power Source** 24VDC at 35mA
- **Operating Temp.** 0° to 49° Celsius (32° to 120° Fahrenheit)
- **Case Finish** Black powder coating
- **Cabling** Two wires required

DC-1224 Clock Description

DC-Analog Clocks may be surface or flush mounted. DC-Analog Clocks are designed to run and reset off two wires. This design can be used in either existing building or new construction. DC-Analog Clocks can be linked via most master clocks to form a hourly automatic correction system.

DC-Analog DC-1224 Clock Dimensions

Single Dial
 2 1/4 x 4 UTILITY BOX
 FLUSH TO 1/8 BELOW
 FINISHED WALL

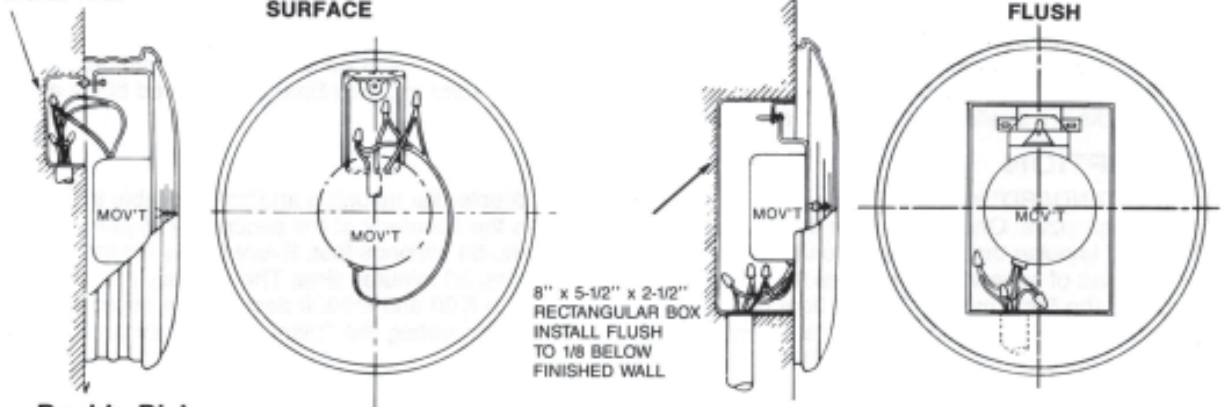

Double Dial
 (4 x 4 outlet box supplied by others)
 Note: Double Dial Assemblies
 require 2 Surface clocks.

